


## WASTEWATER LAGOON FENCE LOCATION AND SPECIFICATIONS

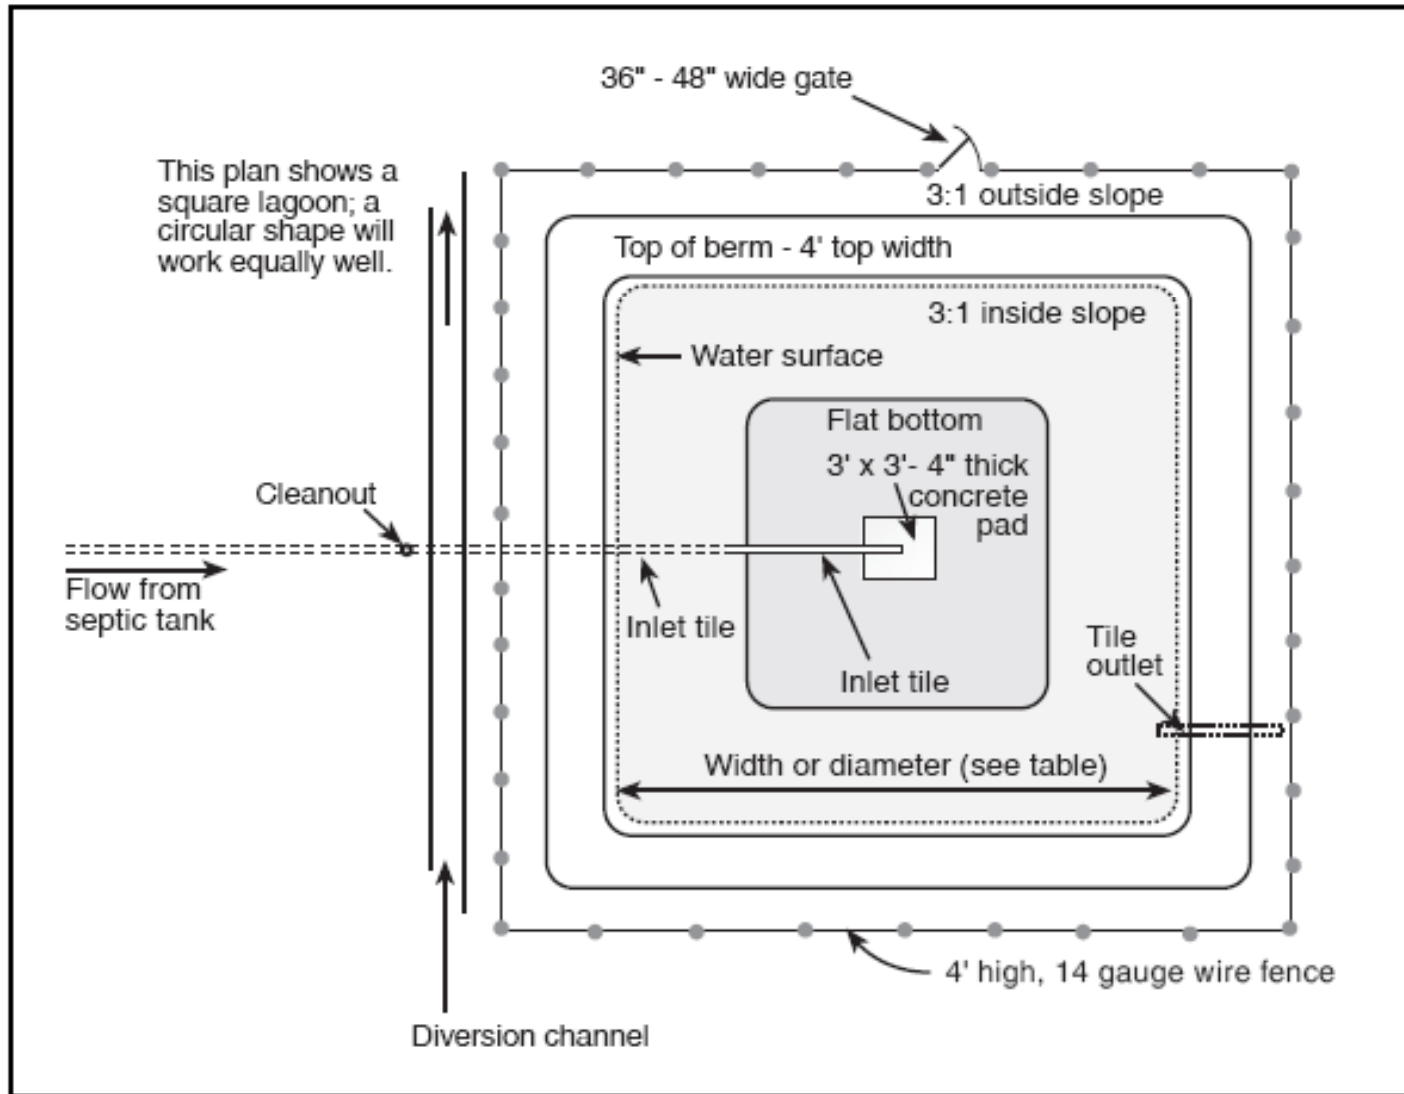

**THE FENCE MUST BE IN PLACE PRIOR TO USE OF THE LAGOON!** The fence must be at least 4 feet in height, be welded, woven or chain link material with no smaller than fourteen gauge wire. Cattle or hog panels can be substituted with tee post being used for a line post. Fence post shall be pressure-treated wood, galvanized and or painted steel. Line posts should be at least 18 inches deep and not spaced more than 10 feet apart. Corner posts should be at least 24 inches deep and properly braced. The gate may be substituted with a cattle or hog panel that is allowed to open for mowing and maintenance, but must be secured with an effective latching device. The fence shall be no closer than the center of the berm to the water's edge. The fence shall be of sound construction with no gaps or openings along the bottom.